

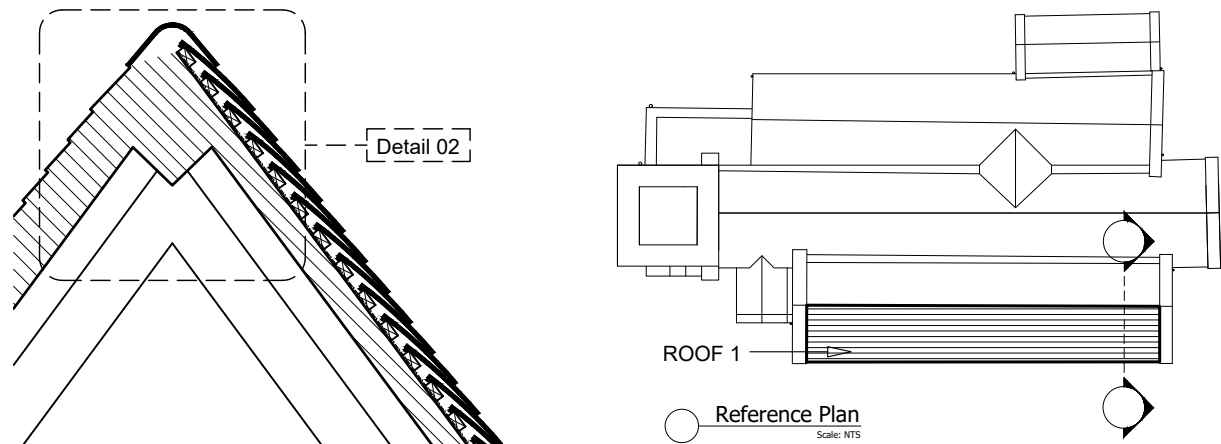


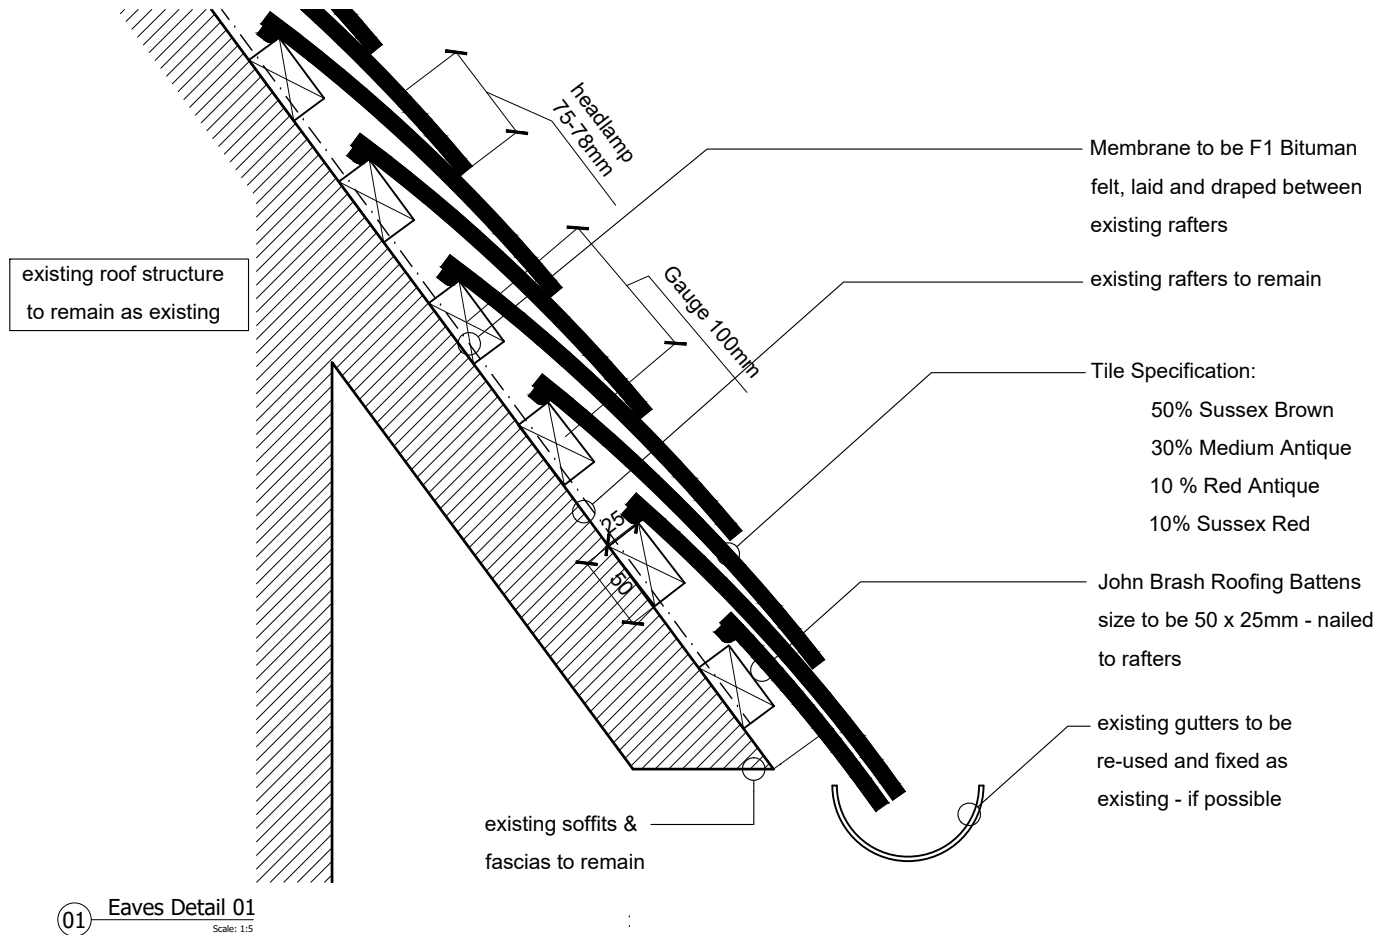


SPECIFICATION:

- Tiles from Tudor Roof tiles - 01797 3203202.
- Tiles to be the same size as existing - 265mm x 165mm nibbed, nailed every 5 courses with aluminium or copper clout nails, min 38-40mm long
- John Brash Roofing Battens size to be 50 x 25mm, gauge to be 100mm - nailed to every rafter with stainless steel or galvanised ring-shank nails of adequate length
- Over lap of tiles to be between 75 - 78mm

- Membrane to be F1 Bituman felt, laid and draped between existing rafters
- Tile Specification:
 - 50% Sussex Brown
 - 30% Medium Antique
 - 10 % Red Antique
 - 10% Sussex Red
- Ridge tiles to be Hogs Back Ridge Tile - colour to be Medium Antique
- Mortar to be NHL 5 - Lime Mortar, colour to match ridge tiles, ridge tiles to be fully bedded

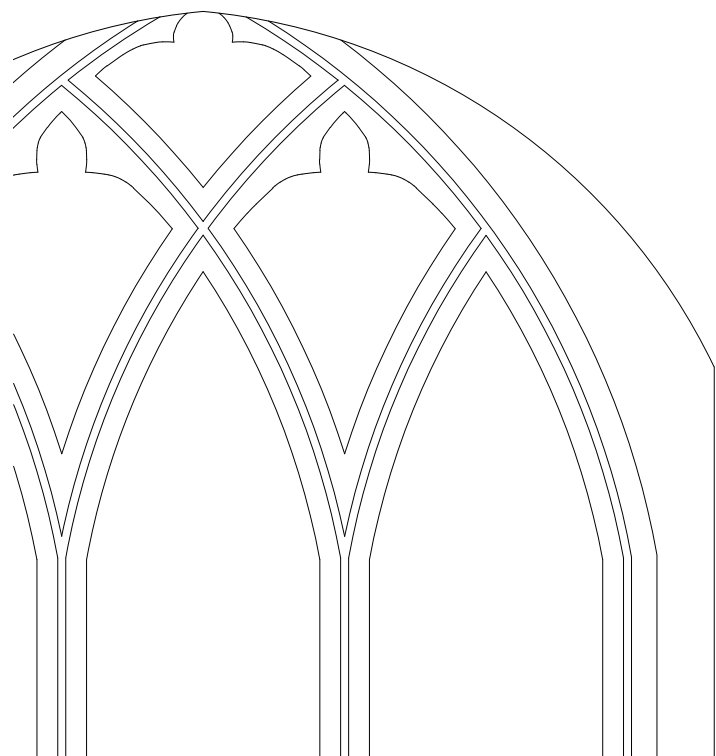

01 Eaves Detail 01
Scale: 1:5

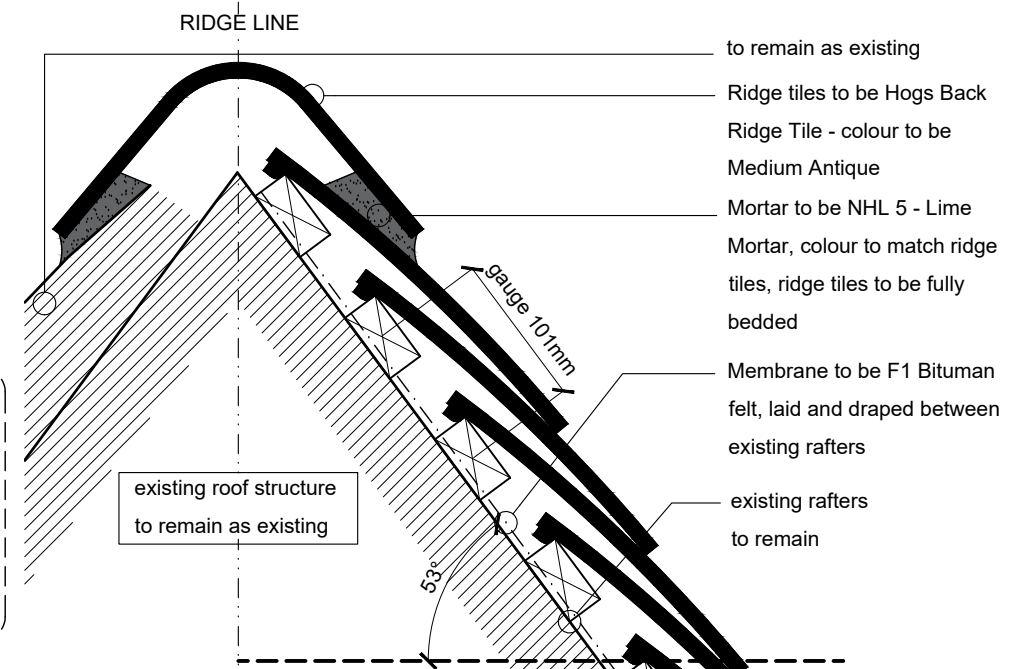

02 Ridge Detail 02
Scale: 1:5

NOTES

- 1 No deviation may be made from the details shown on this drawing without prior permission of the architects. Any discrepancy found between this drawing and anyother document should be referred immediatly to the architects. IF IN ANY DOUBT ASK.
- 2 No dimensions should be scaled from this drawing.
- 3 This drawing is to be removed from currency immediatly a revised version is issued.
- 4 All rights described in chapter IV of the Copyright, Desings and Patents Act of 1988 have been generally asserted.

LEGEND

REVISIONS

00/00/00	01	xxx
----------	----	-----

TENDER

JBKS Architects © architects urban designers landscape and product designers Suite 1, Parkwood Stud, London Road, Aston Rowant, Oxon, OX49 5SP Tel: (01844) 350101		
Job	St Peters Church Caversham	
dwg title	Proposed South Aisle Roof 1 Section & Details - sheet 1	
scale	As Shown	@ A3
date	12/02/26	
Project	Dwg No.	Rev
CAV - R	23 012	00